


CROMARTIE KILNS LIMITED

...at the centre of ceramics


Instructions For Use and Operation of The Policeman Controller

1. Plug in the Policeman Controller
(The Policeman will go through a Self Testing procedure).
2. The Policeman has been programmed to cut off between 700°C and 1300°C. To enter the Policeman cut off temperature, press and hold →. To alter the temperature press ♦ to increase and to ♦ decrease.
3. Set the timer for the length of firing plus half an hour.
4. **The policeman has now been set and the kiln is ready to fire.**
5. Should the kiln overshoot, the power supply to the kiln will be shut off and **-AL-** will appear on the screen.
6. To reset the Policeman Controller simply press both ♦ and ♦ at the same time. The display will now return to temperature.



Note! If the controller goes into programming mode accidentally, leave for 10 seconds, it will then reset itself for normal operation.

Functions in Brief

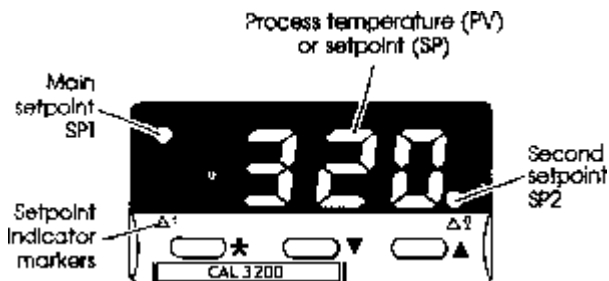

Routine adjustments

- View setpoint
- ♦ Increase setpoint
- ♦ Decrease setpoint

To reset alarm or fault message

- ♦♦ Momentarily press together

